

1 **RELIABILITY IMPROVEMENT IN SHORT HEADWAY TRANSIT**
2 **SERVICES: SCHEDULE-BASED AND HEADWAY-BASED**
3 **HOLDING STRATEGIES**

4
5 *Revised paper prepared for the 89th Annual Meeting of the Transportation Research*
6 *Board 2010*

7
8 Niels van Oort
9 HTM Transit Company
10 Department of Research and Development
11 P.O. Box 28503
12 2502 KM The Hague, The Netherlands
13 Telephone: +31.70.3848518
14 Fax: +31.70.3848476
15 E-mail: N.van.Oort@HTM.net

16
17 Nigel H.M. Wilson
18 Massachusetts Institute of Technology, Room 1-238
19 Department of Civil and Environmental Engineering
20 77, Mass. Ave.
21 Cambridge, MA 02139, USA
22 Telephone: 617 253 5046
23 E-mail: nhmw@MIT.edu

24
25 Rob van Nes
26 Delft University of Technology
27 Faculty of Civil Engineering and Geosciences
28 Transport & Planning
29 P.O. Box 5048
30 2600 GA Delft, The Netherlands
31 Telephone: +31.15.2784033
32 Fax: +31.15.2783179
33 E-mail: R.vanNes@tudelft.nl

34
35 November 2009

36
37 Word count:

38 Abstract (211) + Text (5036) + Figures/Tables (9*250) = 7497

1 ABSTRACT

2

3 Improving service reliability is becoming a key focus for most public transport operators.
4 One common operational strategy is holding. Holding vehicles can improve reliability,
5 resulting in both shorter travel times and less crowding.

6 In this paper, both schedule-based and headway-based holding strategies are analyzed in
7 short headway services. Despite a significant focus on holding in current literature, some
8 important aspects have not been researched previously. The main, new, variables are the
9 maximum holding time, the reliability buffer time and, in the case of schedule-based
10 holding, the percentile value used to design the schedule. Both a real line in The Hague
11 (tram line 9) and hypothetical lines are analyzed with various levels of running time
12 variability. Both headway-based and schedule-based holding have the largest effect if
13 deviations are high. When applying schedule-based holding and a maximum of 60 s.
14 holding time is applied, the optimal value of the percentile value becomes about 65% for
15 all lines analyzed. When no maximum holding time is applied, schedule-based holding is
16 more effective, while there is no difference when the maximum holding time is set to 60s.
17 This research also shows the effect of holding on crowding: An average level of
18 irregularity of 20% could decrease to 15%, enabling either smaller capacity slack or less
19 crowding.

1. INTRODUCTION

Improving service reliability is becoming a key focus for most public transport operators. The development of Automated Vehicle Location systems (AVL), Automated Passenger Counting (APC) and Computer Aided Dispatching systems (CAD) in the past two decades has facilitated research on and implementation of measures to improve reliability. While improved reliability can be achieved through changing the service plan (both network design and scheduling), the traditional approach in public transport practice focuses on the operational level. In (1) several options of this type are described. One common operational strategy is holding. Holding vehicles can improve reliability, resulting in both shorter travel times and less crowding.

Holding strategies can be designed in various forms with a major differentiating characteristic being how a holding action is triggered. Commonly either headway or schedule deviation is used to initiate holding. If the preceding headway of a vehicle is short or a vehicle is operating ahead of schedule, the vehicle will be held. The most commonly used method is a threshold strategy, whereby vehicles are held only if a certain threshold is exceeded (2). The next section reviews prior literature in this area.

While this research focuses on holding at a stop, holding at traffic lights is also a common strategy, for example conditional holding as analyzed by (3,4). The advantage of traffic signal strategies is that the traffic lights enforce holding, but the disadvantage is that waiting at the traffic lights does not enable passengers to board during the hold and priority for (almost) all vehicles may be preferable over conditional priority.

In this paper holding is presented as a measure to reduce travel time on a single line, but it can also be employed to ensure transfers, as explored by (5) and (6). Holding can also be very effective in restoring service after service disruptions have occurred, as described by (7,8,9).

This research, however, focuses on holding in normal operations. The focus is on short headway service, assuming random passengers' arrivals at stops. This means that headways can be used to calculate waiting times.

2. HOLDING STRATEGIES

In this section the main holding strategies and their associated key variables are explained. In section 3 the mathematical model is given, including the effect of holding strategies on waiting time for passengers.

When applying holding points, it is important to determine the location(s) of holding points. However optimizing the number and location of holding points is beyond the scope of this research. Rather the holding location is chosen in a pragmatic way: good holding points are where there are few through passengers and many passengers boarding downstream (10,11,12).

2.1 Headway-Based Holding

Headway-based holding means that vehicles with headways shorter than scheduled are held to restore a tight headway distribution. No action is taken for vehicles with long headways because it is assumed that vehicles cannot be sped up. When applying headway-based holding the following variables are considered:


Holding factor

This factor determines how long vehicles are held relative to the difference between the actual and scheduled headways. A holding factor of 100% means that vehicles are held the full amount of time needed to achieve the scheduled headway. This means that even if only one vehicle experiences a delay, all following vehicles could also be held. A lower holding factor will reduce this effect.

Maximum holding time

Introducing a maximum holding time affects the maximum individual travel time. Maximum holding prevents anyone from experiencing extremely long travel times in order to achieve the optimum for all passengers. Experience has shown that in short headway service, holding times longer than 60 seconds are generally not acceptable to either passengers or drivers.

Figure 1 illustrates the headway-based holding strategy. Vehicle 1 is delayed and vehicle 2 is ahead of schedule, creating a short headway between them. At stop 3, the holding point, vehicle 2 will be held by an amount of time equal to either the maximum holding time or the product of the holding factor and the headway deviation. By holding vehicle 2, the headway between vehicle 2 and 3 also decreases, which could then also lead to the holding of vehicle 3 (depending on the trajectory of vehicle 3).

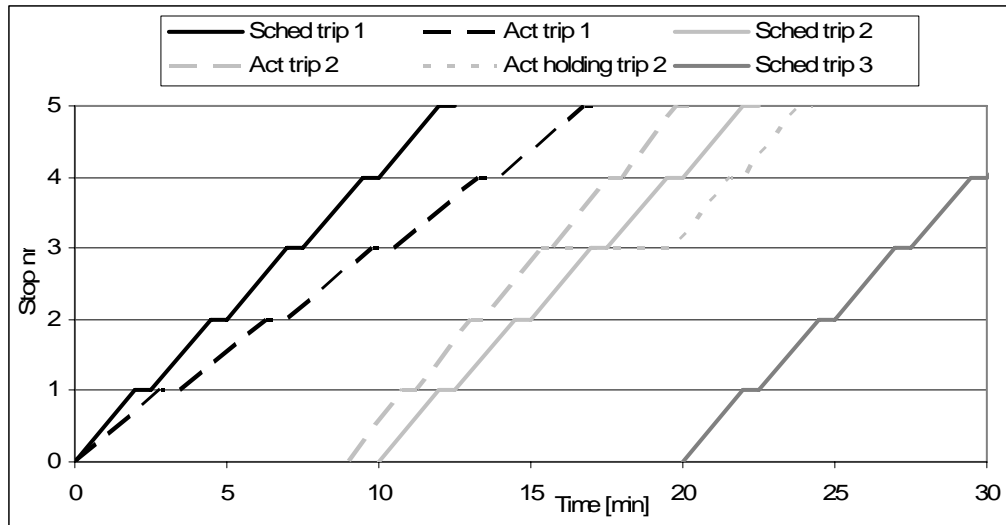

1
2 **FIGURE 1 Headway-Based Holding.**

3
4 **2.2 Schedule-based Holding**

5 In contrast to headway-based holding, schedule-based holding involves analyzing only
6 one vehicle at a time. At the holding point the vehicle's schedule adherence is checked
7 and if the vehicle is ahead of schedule it is held for a certain time. The following
8 variables are of importance.

9
10 *Schedule percentile value*


11 Because a comparison is made between the performance and the schedule of a specific
12 vehicle, schedule design plays an important and direct role in this type of holding. For
13 example, if scheduled trip times are very tight, few vehicles will operate ahead of
14 schedule and little, if any holding is necessary. On the other hand, if the schedule is very
15 loose, most vehicles will be ahead of schedule and will be held. To determine scheduled
16 trip time, most transit operators use a percentile value of the cumulative distribution of
17 the actual trip times from the previous period. Earlier research has investigated the effect
18 of this choice on additional waiting time for passengers in the case of scheduled arrival of
19 passengers (1,12). Note that this is not relevant in the case of random arrivals of
20 passengers and headway-based holding.

21
22 *Maximum holding time*

23 Similar to headway-based holding, a maximum holding time is included to insure that the
24 model results are acceptable.

25
26 Figure 2 illustrates the schedule-based holding, dealing with the variables mentioned
27 above and showing both the 5- and 95-percentile values of trip 1. The actual trajectory of
28 trip 1 is also shown. At the holding point, stop 3, a comparison is made between the
29 scheduled and actual departure times. Depending on the percentile value, the actual trip is
30 ahead of schedule or delayed. In this example the figure shows that the vehicle is ahead
31 of schedule and is held for a certain time. The holding time is either the earliness or the
32 maximum holding time. By holding the vehicle, the following headway will be

1 shortened. However, the next vehicle is held only if its schedule adherence is negative,
 2 regardless of the value of the headway.
 3

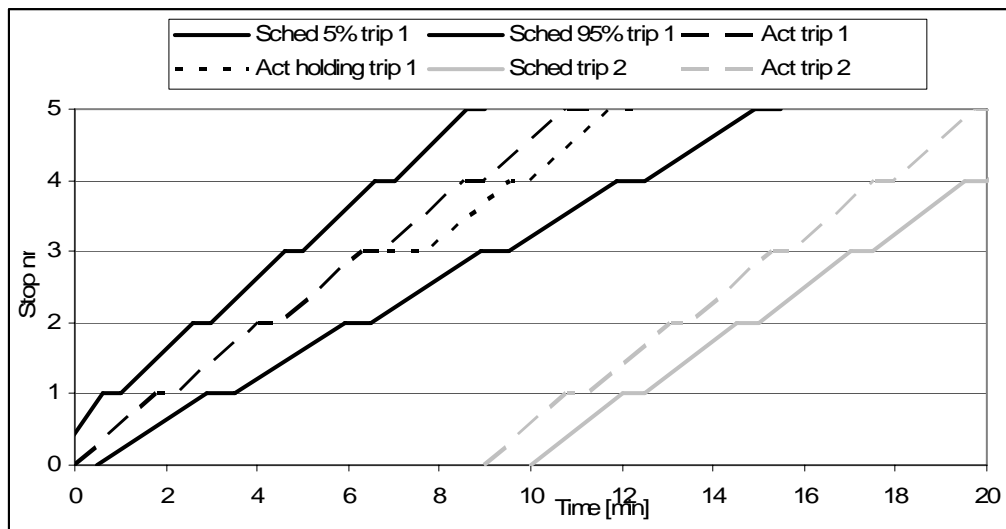

4 **FIGURE 2 Schedule-Based Holding.**

7 2.3 Literature Review

8 Several research papers on holding have been published (e.g. 13,14). In (15), an overview
 9 of some earlier research on holding is provided most of which focus on headway-based
 10 holding. In (11) research on holding using thresholds is presented. The influence of
 11 different perceptions of waiting at the stop and inside the vehicle (due to holding) is
 12 shown. When the perception of waiting at a stop (as a ratio of waiting in the vehicle)
 13 increases, holding becomes more interesting. In (16) headway-based and schedule-based
 14 holding strategies are compared, concluding that headway-based control is more
 15 effective. Proportional holding, i.e. holding time as a fraction of the headway or schedule
 16 deviation, is also mentioned but results are not provided. Reference (17) deals with the
 17 holding problem for low-frequency services. Besides average travel time, also the
 18 budgeted travel time is considered. Reference (18) also deals with the phenomenon that
 19 travelers budget additional travel time ensuring on time arrival, referring to it as a
 20 Reliability Buffer Time (RBT). This indicator shows the effect of unreliability by taking
 21 into account the 95-percentile arrival time. Many passengers want to be on time for an
 22 activity at their destination and allow for this additional time required when planning
 23 their trip. In addition, (17) also considers the possibility of operators adding slack time
 24 into the schedule. This ensures that reliability will increase, although a trade-off clearly
 25 exists between reliability and travel time, due to additional scheduled trip time when
 26 slack is included. Other researchers (19) performed a real-life experiment, applying
 27 threshold-based holding. They show positive results for headway-based holding and they
 28 state that the reported effect of holding may have been understated because human
 29 factors can greatly reduce the effectiveness of the holding strategy. (20) focuses on
 30 holding when real-time information is available, enabling better holding strategies. (21)
 31 shows research on schedule-based holding in high-frequency systems and explicitly
 32 accounted for the effects of schedule. One of the observations was that long holding
 33 times are hard to enforce in practice, supporting the introduction of maximum holding

1 time. Finally, (22) presented research on schedule-based holding, also including
2 scheduling issues, but assumed passengers arrive according to the schedule.

3 The literature review shows that not all the important variables (i.e. maximum
4 holding time, schedule percentile value and RBT) have yet been taken into account in any
5 single piece of research on holding. The maximum holding time is relevant for both
6 operators and drivers and for passengers. The introduction of maximum holding accounts
7 for the effect of holding on individual passengers. It makes it possible to optimize
8 scheduling and holding strategies recognizing a minimum service quality for all
9 passengers, i.e. a maximum additional travel time due to holding. Additionally, in the
10 case of rail systems, limited capacity and shared use of tracks with other lines could force
11 held vehicles to depart (before holding time is expired). Although leading to an optimum
12 for all passengers on average, holding strategies without a maximum holding time are not
13 likely to be acceptable if holding times exceeds 60 seconds (in the case of short
14 headways). Experiences in The Hague show operators are not willing to adopt large
15 holding times because of concerns about the acceptability to both passengers and drivers.
16 (21) also states that long holding times are hard to enforce.

17 Due to the lack of research on the effect of introducing maximum holding time
18 and little focus in the literature on the effect of schedule parameters on short headway
19 service holding strategies, this paper focuses on these variables. The objective of this
20 research is to assess the impact of the key variables on the optimal holding strategy
21 (regarding travel time of passengers). Although headway-based holding is the main
22 research topic in literature, this research deals with both headway-based and schedule-
23 based holding. From a practical point of view, schedule-based holding may be interesting
24 even if headways are short. Due to resource planning and workforce management
25 concerns, schedules exist anyway and it is much easier to deal with schedules than with
26 headways, which involves two vehicles. Another interesting phenomenon is the existence
27 of branched networks all over the world, providing short headways on the trunk part, but
28 on the branches headways could become large enough for many passengers to arrive at
29 the stop based on the schedule. In this case, schedule adherence is preferred over
30 headway adherence. Additionally, in most Western European countries, schedule
31 adherence is similar to headway adherence, since schedules provide constant headways.

33 **3. MODEL FORMULATION**

34
35 To calculate the effect of holding strategies on passengers' travel time, a model has been
36 developed. The main objective is to compute the additional waiting time, the time which
37 is added as a result of service unreliability. In a perfectly regular service additional
38 waiting time is zero per passenger.

39 First the variables used and the main assumptions made in the model are defined.
40 Next the equations used to calculate additional travel time are presented. Finally,
41 equations are given to calculate the effects of headway and schedule based holding on
42 headways.

43 **3.1 Variables and Assumptions**

44 The variables in this research are:

- 45 - Number and location of holding points;

- 1 - Passenger boarding and alighting distribution;
- 2 - Standard deviation of total trip time;
- 3 - Percentile value used to determine scheduled trip time (schedule-based holding
- 4 only);
- 5 - Maximum holding time;
- 6 - Holding factor (headway-based holding only);
- 7 - Scheduled headway.

8

9 This research focuses on short headway services, assuming random arrival of passengers
 10 at stops. In addition, cycle time is considered fixed (as in (22)). This results in longer
 11 layover times if lower percentile values are used for the scheduled trip time. However
 12 layover time is assumed to be long enough to enable punctual departures in the opposite
 13 direction. In addition, there is assumed to be no relation between headways and trip times
 14 (including dwell times), as in (21). Neither is a direct link considered between the holding
 15 time and the number of on-board passengers. Holding is applied at a stop and only the
 16 preceding headway is considered, because at the holding point, no information is
 17 assumed to be available about the following headway. The final assumption is that
 18 scheduled headways are constant.

19

20 3.2 Calculation of Additional Travel Time

21 To calculate the additional travel time per passenger due to unreliable service, both the
 22 waiting time at the stops and in the vehicle must be considered. Note that the latter only
 23 occurs when holding is applied. Equation 1 gives the average additional waiting time at a
 24 stop as a function of scheduled and actual headways (23). Equation 2 gives the average
 25 additional waiting time in the vehicle if holding is applied at stop h .

26 To calculate the additional (average) travel time per passenger on the line,
 27 equations 3 and 4 are used. Besides the average additional travel time, (18,24) argue that
 28 the reliability buffer time (RBT) is also important, reflecting the effect of unreliable
 29 services on passengers travel time budget. Equations 5-8 deal with the RBT which are
 30 also weighted per stop to calculate a line total. The 95th percentile value of waiting time is
 31 taken out of the actual trip data set and similar to (18,24) the RBT is calculated for the
 32 waiting time in the vehicle as well. Finally equation 9 assesses the total additional time
 33 using different weights for different components (compared to in-vehicle time).

34

$$35 \quad T_j^{\text{waiting_stop}} = \frac{H^{\text{sched}}}{2} * (c_v(H_j^{\text{act}})^2) \quad (1)$$

36

$$37 \quad T_j^{\text{waiting_vehicle}} = \frac{\sum_{i=1}^{n_i} T_{i,j}^{\text{waiting_vehicle}}}{n_i} \quad j=h \quad (2)$$

38

$$39 \quad T^{\text{Waiting_stop}} = \sum_{j=1}^{n_j} \alpha_j * T_j^{\text{waiting_stop}} \quad (3)$$

40

$$1 \quad T^{\text{waiting-vehicle}} = \sum_{j=1}^{n_j} \beta_j * T_j^{\text{waiting_vehicle}} \quad (4)$$

$$2 \quad RBT_j^{\text{waiting_stop}} = T_{i,j}^{95\% \text{waiting_stop}} - T_j^{\text{waiting_stop}} \quad (5)$$

$$3 \quad RBT_j^{\text{waiting_vehicle}} = T_{i,j}^{95\% \text{waiting_vehicle}} - T_j^{\text{waiting-vehicle}} \quad \text{if } j=h \quad (6)$$

$$4 \quad RBT^{\text{waiting_stop}} = \sum_{j=1}^{n_j} \alpha_j * RBT_j^{\text{waiting_stop}} \quad (7)$$

$$5 \quad RBT^{\text{waiting_vehicle}} = \sum_{j=1}^{n_i} \beta_j * RBT_j^{\text{waiting_vehicle}} \quad (8)$$

$$6 \quad T_{\text{add}} \approx \theta_{\text{stop}} * T^{\text{waiting_stop}} + \theta_{\text{in-vehicle}} * T^{\text{waiting_vehicle}} + \theta_{\text{RBT}} * (RBT^{\text{waiting_stop}} + RBT^{\text{waiting_vehicle}}) \quad (9)$$

7 where:

8 i = index of vehicle

9 j = index of stop

10 $T_j^{\text{waiting_stop}}$ = Average additional out-of-vehicle waiting time at stop j

11 $T_j^{\text{waiting_vehicle}}$ = Average additional in-vehicle waiting time at stop j

12 H^{sched} = Scheduled headway

13 H_j^{act} = Actual headway ahead at stop j

14 c_v = Coefficient of variation

15 n_i = number of trips observed

16 α_j = Relative weight of boardings at stop j

17 β_j = Relative weight of through passengers at stop j

18 $RBT_j^{\text{waiting_stop}}$ = Reliability buffer time of waiting at the stop

19 $RBT_j^{\text{waiting_vehicle}}$ = Reliability buffer time of waiting in the vehicle

20 T_{add} = Additional travel time per passenger

21 θ_{stop} = Relative perception of waiting time at the stop

22 θ_{holding} = Relative perception of holding time in the vehicle

23 θ_{RBT} = Relative perception of Reliability Buffer Time

24

25

26

27

28

1 *a) Calculation of headway-based holding impacts*

2 To calculate the additional travel time, the model calculates the effect of headway-based
 3 holding (at stop h) on headways. A change in headways will lead to a change in
 4 additional travel time (eq. 1-9). Equations 10 and 11 give the holding time and the effect
 5 on waiting time in the vehicle, while equations 12 and 13 show the effect of departure
 6 times and headways for the rest of the trip and the following trip. Note the effect of
 7 holding trip i on the holding choice process for trip i+1.

8

9

$$10 \quad T_{i,j}^{holding} = \text{Min}(\gamma * (H_{i,j}^{sched} - H_{i,j}^{act}), T_{i,j}^{max\ holding}) \quad \text{if } j = h \text{ and } H_{i,j}^{sched} - H_{i,j}^{act} > 0 \quad (10)$$

$$11 \quad T_{i,j}^{holding} = 0 \quad \text{if } j = h \text{ and } H_{i,j}^{sched} - H_{i,j}^{act} < 0$$

$$12 \quad T_{i,j}^{holding} = 0 \quad \text{if } j \neq h$$

13

$$14 \quad T_{i,j}^{vehicle} = T_{i,j}^{holding} \quad j \geq h \quad (11)$$

15

$$16 \quad D_{i,j}^{act} = D_{i,j}^{act} + T_{i,j}^{holding} \quad j \geq h \quad (12)$$

17

$$18 \quad H_{i,j}^{act} = D_{i,j}^{act} - D_{i+1,j}^{act} \quad j \geq h \quad (13)$$

19

20

21 where:

$$22 \quad T_{i,j}^{holding} = \text{Holding time of vehicle } i \text{ at stop } j$$

$$23 \quad \gamma = \text{Fraction of headway deviation that vehicle is held for}$$

$$24 \quad T_{i,j}^{max\ holding} = \text{Maximum holding time}$$

$$25 \quad D_{i,j}^{act} = \text{Actual departure time of vehicle } i \text{ at stop } j$$

$$26 \quad D_{i,j}^{act} = \text{New actual departure time of vehicle } i \text{ at stop } j \text{ (after holding)}$$

27

28 *b) Calculation of schedule-based holding impacts*

29 Equations 14 and 15 give the effect on waiting time in the vehicle in the case of schedule-
 30 based holding being applied at stop h. Equations 16 and 17 give the effect of holding on
 31 the portion of the trip downstream of the holding point. Note that equations 15-17 are
 32 similar with the headway based holding equations. In contrast to headway-based holding,
 33 schedule-based holding does not affect the holding decision process for the next trip: In
 34 equation 10, H is used, while equation 14 uses D. Regarding the next trip, the holding
 35 process only affects H.

36

$$37 \quad T_{i,j}^{holding} = \text{Min}((D_{i,j}^{sched} - D_{i,j}^{act}), T_{i,j}^{max\ holding}) \quad \text{if } j = h \text{ and } D_{i,j}^{sched} - D_{i,j}^{act} < 0 \quad (14)$$

$$38 \quad T_{i,j}^{holding} = 0 \quad \text{if } j = h \text{ and } D_{i,j}^{sched} - D_{i,j}^{act} > 0$$

$$39 \quad T_{i,j}^{holding} = 0 \quad \text{if } j \neq h$$

40

1 $T_{i,j}^{vehicle} = T_{i,j}^{holding} \quad j \geq h \quad (15)$

2

3 $D_{i,j}^{act} = D_{i,j}^{act} + T_{i,j < j}^{holding} \quad j \geq h \quad (16)$

4

5 $H_{i,j}^{act} = D_{i,j}^{act} - D_{i+1,j}^{act} \quad j \geq h \quad (17)$

6

7 where:

8 $D_{i,j}^{sched} = \text{Scheduled departure time of vehicle } i \text{ at stop } j$

9

10 **4. ANALYSIS OF HOLDING STRATEGIES**

11


12 To analyze the importance of the key variables and their effects on reliability and waiting
 13 time, the model is applied with actual data for both a real line as well as hypothetical
 14 lines. Analysis of hypothetical lines helps to set some design variables freely, which leads
 15 to insights helping the design of real lines. Analysis of actual lines on the other hand
 16 shows the practical benefits which could be used for theory development.

17

18 **4.1 Case Study: Tram Line 9, The Hague**

19 To assess the effect of applying different holding strategies in practice, tram line 9 in The
 20 Hague, operated by HTM, is analyzed. This line is the busiest line in the city, operating
 21 from the suburbs in the South West via the city centre to Scheveningen, a beach resort.
 22 Line 9 consists of 32 stops, is 14 km. long and operates at 5 min. headway. The standard
 23 deviation of total trip time is about 3.5 min. Figure 3 shows the passengers' travel pattern
 24 on line 9: both the percentage of boardings per stop and the percentage of through
 25 passengers are shown. They are shown as a percentage of total boardings on the complete
 26 line.

27

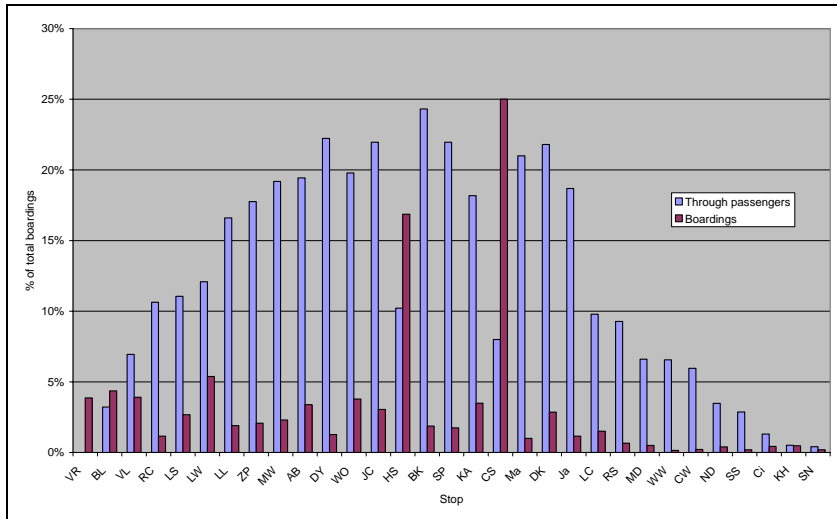

28 **FIGURE 3 Percentage Boardings and Through Passengers per Stop (of Total**
 29 **Boardings) on Line 9.**


30

31

1 Figure 3 clearly illustrates that stops 14 (HS) and 18 (CS) are dominant. They are both
 2 major stations offering many connections to other local, regional and intercity rail
 3 services. The number of through passengers is low at these stops, which makes them
 4 interesting stops for holding. In this research, stop 14 (HS) is chosen as the holding point.
 5 At this point the through passengers ratio is 10%. The number of passengers boarding
 6 downstream is 60% of total boardings and 50% of total boardings are within 5 stops,
 7 maximally benefiting from holding.

8
 9 **4.2 Hypothetical Lines**

10 Besides the analysis of an actual line, an assessment of the effect of holding strategies is
 11 also made for hypothetical lines. In this way, more insights can be developed regarding
 12 holding and the impact of several variables. The hypothetical line consists of thirty stops
 13 with scheduled trip time being constant between all adjacent stops. Three different
 14 standard deviations (σ) of total trip times are considered: 2 mins., 4 mins. and 6 mins.
 15 The passengers' travel pattern is shown in figure 4. Both the number of through
 16 passengers and the boardings are illustrated as a percentage of total boardings on the line.
 17 Note that this passengers' pattern differs from that of line 9. Service frequency is 6
 18 vehicles an hour.

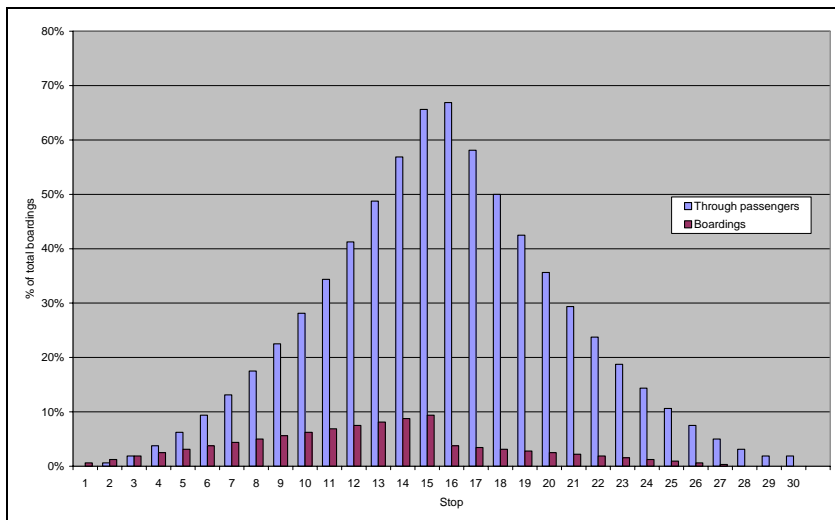

20
 21 **FIGURE 4 Percentage Boardings and Through Passengers per Stop (of Total**
 22 **Boardings) on Theoretical Lines.**

23
 24 Stop number 8 is chosen as the holding point. At this point, the number of through
 25 passengers is low (18%) and the number of downstream boardings is high (82%).

26
 27 **4.3 Results**


28 For both the actual case and the hypothetical lines, both headway-based holding and
 29 schedule-based holding strategies are analyzed with the results given below. In this
 30 research γ is set to 0.75 and the values of θ are (according to 24):

31
 32 $\theta_{\text{stop}} = 2,$
 33 $\theta_{\text{RBT}} = 0.7$

1 *a) Headway-based holding results*

2 For the three hypothetical lines and tram line 9, figure 5 shows the results of headway-
 3 based holding compared to the reference case without holding (i.e. maximum holding
 4 time is zero). Analysis is conducted on both one and two holding points and different
 5 values for the maximum holding time are used. The additional travel time is shown as a
 6 percentage of the waiting time in the case where perfect service is provided (i.e. average
 7 waiting time is half the scheduled headway).

8

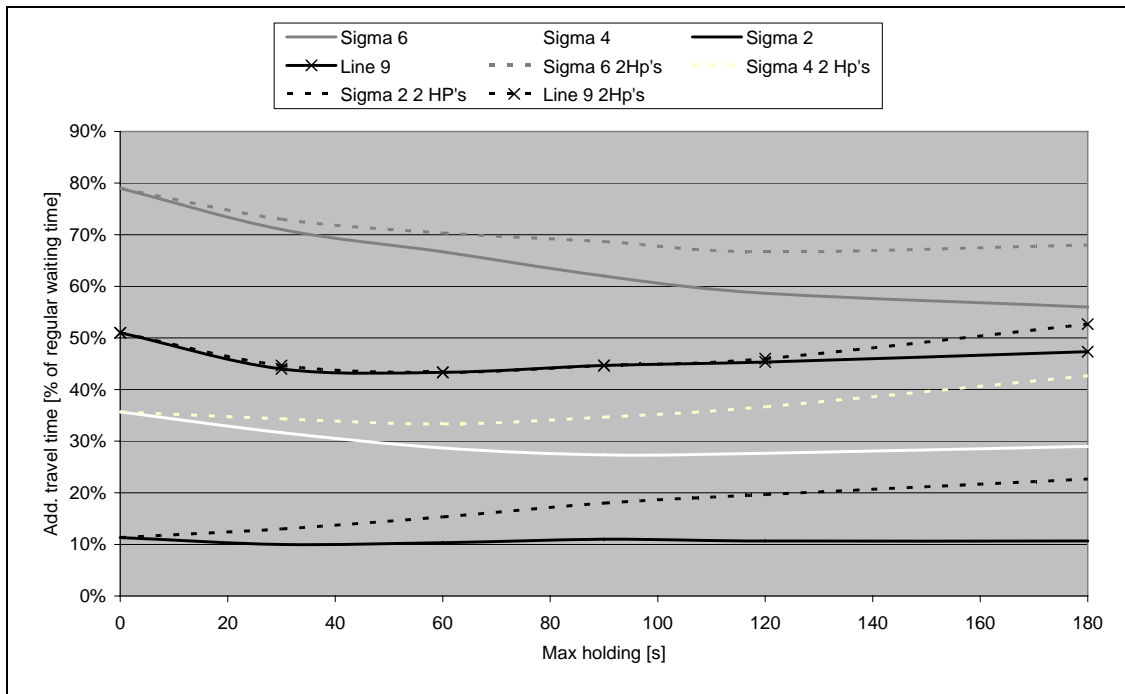

9


10 **FIGURE 5 Effect of Headway-Based Holding on Additional Travel Time (HP =**
 11 **Holding Point).**

12

13 Figure 5 shows that headway-based holding has a positive effect on the additional travel
 14 time: additional travel time has decreased compared to the no holding case, which is
 15 illustrated by the maximum holding value of zero. The decreasing effect increases with
 16 sigma. The optimal maximum holding time decreases with a decrease in sigma. The
 17 optimal value for the maximum holding time is about 180 s. for $\sigma=6$, 100 s. for $\sigma=4$, 40 s.
 18 for $\sigma=2$ and about 60 s. for line 9. The effect of introducing a maximum holding time of
 19 60 s. is also shown in the figure. Actual holding times ($\sigma = 4$) are shown in figure 6 for
 20 both unlimited holding as well as a maximum of 60 s. Unlimited holding involves
 21 holding about 10% of the vehicles longer than 2 minutes.

22

23

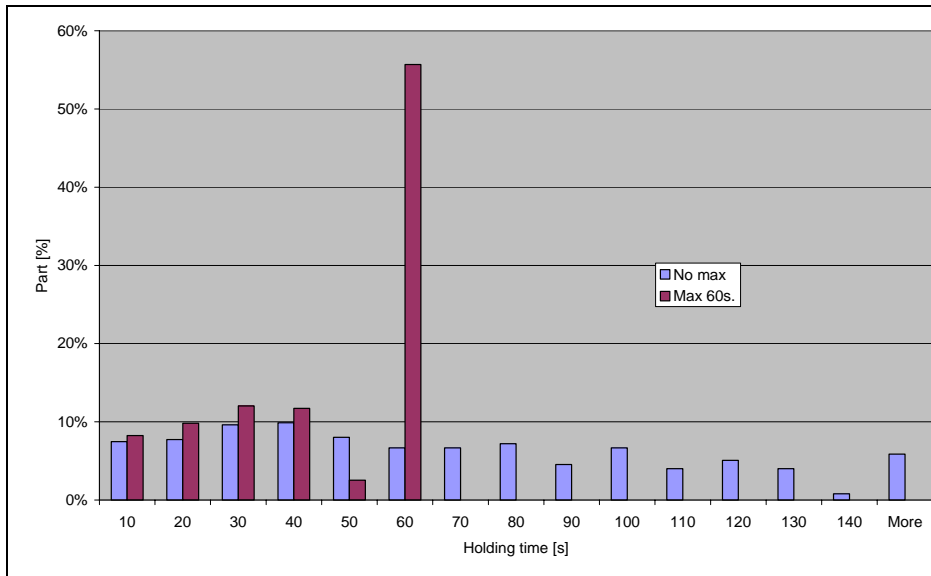


1
2 **FIGURE 6 Holding Times, Headway-Based Holding ($\sigma=4min$).**

3
4 Besides the scenario of applying one holding point, an analysis of adding a second
5 holding point was also conducted. For line 9, the other main station on the line, CS (stop
6 18), is used, while for the hypothetical lines, stop 23 is chosen (see figures 3 and 4). Both
7 stops have a relatively small number of through passengers (8% and 18%). The results in
8 figure 5 show that in the hypothetical case the effect of adding a second holding point is
9 negative: the additional travel is larger than when 1 holding point is applied. This is
10 because there is no good second holding point on this line given the passengers travel
11 patterns. No other point exists with both low numbers of through passengers and high
12 numbers of downstream boardings. On line 9, however, such a point does exist, although
13 the results show no significant benefit over a single holding point in terms of the
14 additional travel time.

15
16 *b) Schedule-based holding results*

17 Figure 7 shows the effects of schedule-based holding on additional travel time which is
18 again shown as a percentage of the average waiting time when service is perfectly on
19 time and headways are equal. Results are shown for both the theoretical lines and line 9
20 for different percentile values chosen for scheduling and different maximum holding
21 times (unlimited and 60 s.).
22

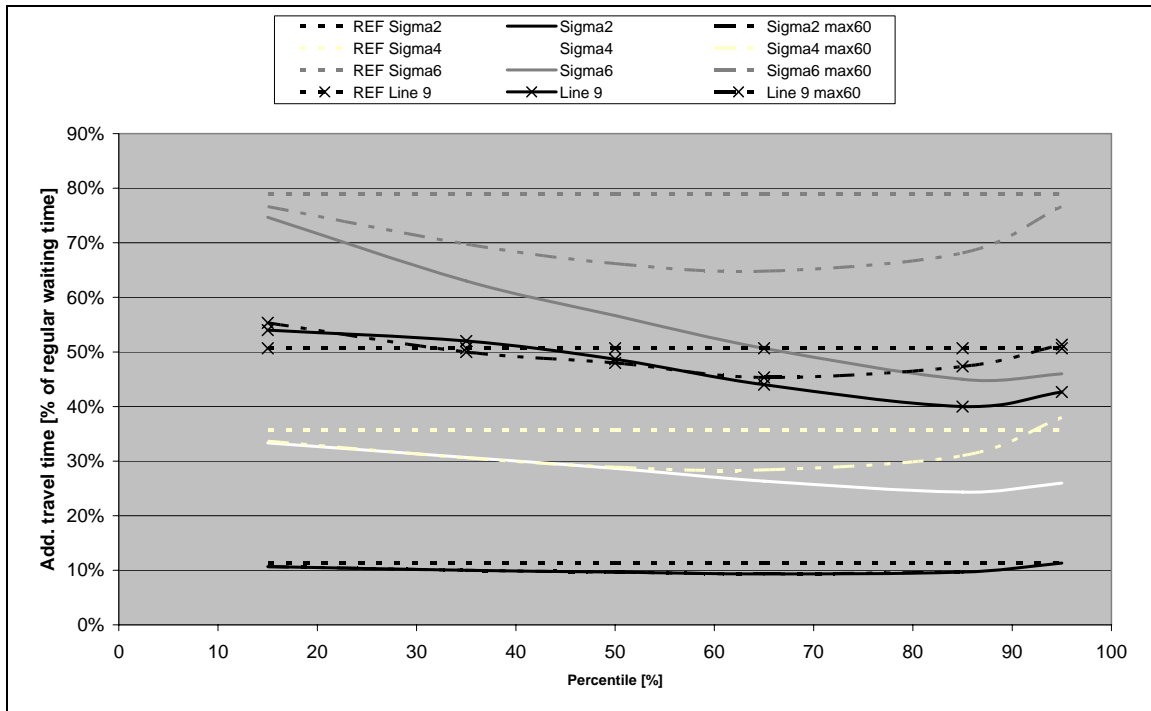


1
2 **FIGURE 7 Effect of Schedule-Based Holding on Additional Travel Time.**

3
4 Figure 7 shows that holding has a positive effect, a decrease of additional waiting time,
5 which increases with sigma. It also shows that the optimal percentile value (where
6 additional travel time is minimal) decreases when sigma decreases. The optimal value, in
7 the unlimited holding case, is between 70% ($\sigma=2$) and 90% ($\sigma=6$). But when a
8 maximum of 60 s. holding time is applied, the optimal value becomes about 65% for all
9 lines.

10 Figure 8 shows an example of applied holding times ($\sigma=4$) for both the unlimited
11 holding strategy as well as a maximum holding time of 60 s. In each case the schedule
12 percentiles values are set to their optimal values. Unlimited holding involves holding
13 about 20% of the vehicles longer than 2 minutes.


14

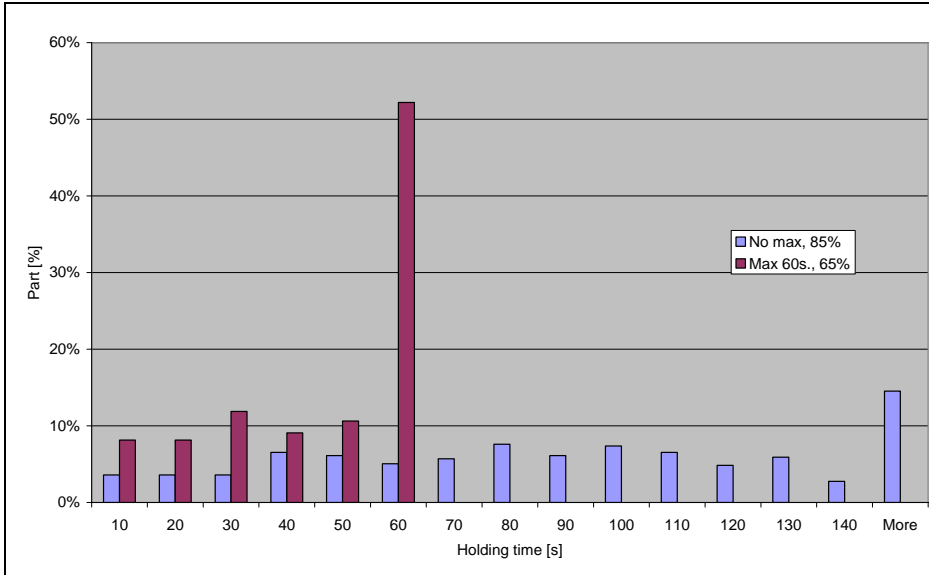

1
2 **FIGURE 8 Holding Times, Schedule-Based Holding ($\sigma=4min$).**

3
4 *c) Effect of holding on the level of crowding*

5 All research on holding referred to in this paper focuses on the travel time effects of
6 holding. However, improving reliability can also affect the level of crowding. Figure 9
7 shows the level of irregularity (actual headway deviation as a percentage of the scheduled
8 headway) for both the reference case as well as two schedule-based and two headway-
9 based holding cases. The cases are based on $\sigma=4$. Both the average irregularity and the
10 95th percentile value are shown. The results differ per case, but in general the average
11 irregularity decreases from 20% to 15% and in case of the 95th percentile from 55% to
12 40-45%. If uniform arrivals are assumed, this number is similar to the excess level of
13 crowding for 50% of the vehicles. The other 50% will experience a lower level of
14 crowding than the average value. Normally, during the process of determination of the
15 number of vehicles, some slack is included with respect to the passenger capacity per
16 vehicle. The results presented here illustrate that either this slack could be decreased
17 (implying that fewer vehicles are needed) or the level of crowding could be decreased.

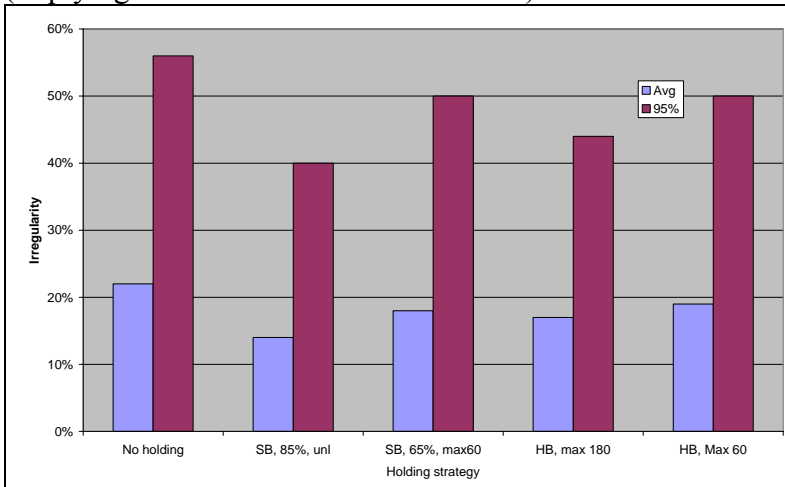

18
19 **FIGURE 9 Irregularity (average and 95th percentile) for Different Scenarios.**

1 *d) Headway-based holding vs. schedule-based holding*

2 The previous sections showed results of both headway-based and schedule-based
3 holding. If these two methods are compared it is clear that the schedule-based method can
4 be more effective in reducing additional travel time. Figure 7 shows that additional travel
5 can be more decreased by schedule based holding than headway-based (as shown by
6 figure 5). The reason for this is that in that case, it is possible to set a loose schedule,
7 which could be very reliable. Normally this implies a slow schedule as well, but when a
8 small number of passengers travel over the holding point this effect is minimal. However,
9 when maximum holding time of 60 s. is introduced, the effects of headway-based and
10 schedule-based holding are similar.

11 **5. CONCLUSIONS**

13 This paper describes research on holding of transit vehicles to improve reliability. Both
14 schedule-based and headway-based holding strategies are analyzed in short headway
15 services. The objective is to reduce additional travel time for passengers, which is the
16 additional time compared to a perfectly punctual and regular service. Despite a
17 significant focus on holding in current literature, some important aspects have not been
18 researched previously. The main, new, variables are the maximum holding time, the
19 reliability buffer time and, in the case of schedule-based holding, the percentile value
20 used to design the schedule. Both a real line in The Hague (tram line 9) and hypothetical
21 lines are analyzed with various levels of running time variability. Both headway-based
22 and schedule-based holding have the largest effect if deviations are high. When holding is
23 headway-based, the optimal value for the maximum holding time is about 180 s. for $\sigma = 6$
24 min., 100 s. for $\sigma = 4$ min., 40 s. for $\sigma = 2$ min and about 60 s. for line 9. Introducing an
25 additional holding point on these lines does not result in further improvements in travel
26 times. When applying schedule-based holding and a maximum of 60 s. holding time is
27 applied, the optimal value of the percentile value becomes about 65% for all lines
28 analyzed. When no maximum holding time is applied, schedule-based holding is more
29 effective, while there is no difference when the maximum holding time is set to 60s. This
30 research also shows the effect of holding on crowding: An average level of irregularity of
31 20% could decrease to 15%, enabling either smaller capacity slack or less crowding.

32 Although the results are useful in practice and research, some future research is
33 recommended to further explore the effects of holding. The main issue is the choice of
34 the holding point. The key variables would be schedule deviations, the number of through
35 passengers and boarding passengers downstream of the holding point. It would be
36 interesting to analyze the effect of different combinations of these values on additional
37 travel time.

38 **ACKNOWLEDGEMENTS**

39 This research is performed in cooperation with HTM, the public transport company in
40 The Hague, Delft University of Technology, Department of Transport & Planning and
41 MIT, Transit Research Group, Boston. This research is supported by the Transport
42 Research Centre Delft and Railforum.
43
44
45
46

1 REFERENCES

- 2
- 3 1. Oort, N. van and R. van Nes. Improving reliability in urban public transport in
4 strategic and tactical design. Presented at the 87th Annual Meeting of the
5 Transportation Research Board, Washington, D.C., 2008.
- 6 2. Barnett, A. On controlling randomness in transit operations. In *Transportation*
7 *Science*, 8(2), 1974, pp. 101-116.
- 8 3. Muller, Th.H.J. and P.G. Furth. Conditional bus priority at signalized
9 intersections: better service with less traffic disruption. In *Transportation*
10 *Research Record: Journal of the Transportation Research Board*, No. 1731,
11 Transportation Research Board of the National Academies, Washington, D.C.,
12 2000, pp.23-30.
- 13 4. Chang, J. Evaluation of service reliability impacts of traffic signal priority
14 strategies for bus transit. In *Transportation Research Record: Journal of the*
15 *Transportation Research Board*, No. 1841, Transportation Research Board of the
16 National Academies, Washington D.C., 2003, pp. 23-31.
- 17 5. Dessautels, A.T. Improving the transfer experience at intermodal transit stations
18 through innovative dispatch strategies. Master's thesis, MIT, Boston, 2004.
- 19 6. Wong, C. and N.H.M. Wilson. Operations control strategies to improve transfers
20 between high-frequency urban rail lines. Presented at Conference on Computer
21 Aided Scheduling on Public Transport, Leeds, 2006.
- 22 7. Wilson, N.H.M., A. Macchi, R.E. Fellows and A. A. Deckoff. Improving service
23 on the MBTA green line through better operations control. In *Transportation*
24 *Research Record: Journal of the Transportation Research Board*, No. 1361,
25 Transportation Research Board of the National Academies, Washington, D.C.,
26 1992, pp. 296-304.
- 27 8. O'Dell, S. and N. Wilson. Optimal real-time control strategies for rail transit
28 operations during disruptions. In: N. Wilson, editor, *Lecture Notes in Economics*
29 *and Mathematical Systems* No. 471: *Computer-Aided Scheduling of Public*
30 *Transport*, Springer, Berlin, 1999, pp. 299-323.
- 31 9. Puong, A. and N. H. M. Wilson. A train holding model for urban rail transit
32 systems. Presented at Conference on Computer Aided Scheduling on Public
33 Transport, 2004.
- 34 10. Abkowitz, M., E. Amir and I. Engelstein. Optimal control of headway variation
35 on transit routes. In *Journal of Advanced Transportation*, No. 20, 1986, pp. 429.
- 36 11. Hickman, M. An analytical Stochastic Model for the Transit Vehicle Holding
37 Problem. In *Transportation Science*, Vol. 35, No. 3, 2001, pp. 215-237.
- 38 12. Oort, N. van and R. van Nes. Controlling operations of public transport to
39 improve reliability: theory and practice. Presented at 88th Annual Meeting of the
40 Transportation Research Board, Washington, D.C., 2009.
- 41 13. Turnquist, M.A. and S.W. Blume. Evaluating potential effectiveness of headway
42 control strategies for transit systems. In *Transportation Research Record: Journal*
43 *of the Transportation Research Board*, No. 746, Transportation Research Board
44 of the National Academies, Washington, D.C.,1980.

- 1 14. Levinson, H. Supervision Strategies for Improved Reliability of Bus Routes.
2 *Synthesis of Transit Practice 15*, National Cooperative Transit Research and
3 Development Program. Transportation Research Board, Washington, D.C., 1991.
- 4 15. Hickman, M. Evaluating the Benefits of Bus Automatic Vehicle Location (AVL)
5 Systems. Chapter 5 in D. Levinson and D. Gillen (eds.), *Assessing the Benefits*
6 *and Costs of Intelligent Transportation Systems*, Kluwer: Boston, 2004.
- 7 16. Lin, G., P. Liang, P. Schonfeld and R. Larson. Adaptive Control of Transit
8 Operations. Technical Report FTA-MD-26-7002, Federal Transit Administration,
9 1995.
- 10 17. Furth, P. G. and T.H.J. Muller. Service Reliability and Optimal Running Time
11 Schedules. In *Transportation Research Record: Journal of the Transportation*
12 *Research Board*, No. 2034, Transportation Research Board of the National
13 Academies, Washington, D.C., 2007, pp. 55-61.
- 14 18. Uniman, D. Service quality measurement using AFC smart card data - a
15 framework for the London underground. Master's thesis, MIT, Boston, 2009.
- 16 19. Abkowitz, M. and M. Lepofsky. Implementing headway-based reliability control
17 on transit routes. *Journal of Transportation Engineering*, Vol. 116, No. 1, 1990.
- 18 20. Eberlein, X. J., N.H.M Wilson and D. Bernstein. The holding problem with Real-
19 Time Information available. *Transportation Science*, Vol. 35, No. 1, 2001, pp. 1-
20 18.
- 21 21. Fattouche, G. Improving High-Frequency Bus Service Reliability through Better
22 Scheduling. Master's thesis, MIT, Boston, 2007.
- 23 22. Oort, N. van, J. Boterman and R. van Nes. Effect of driving-time determination
24 and holding points on reliability. Presented at of Conference on Advanced
25 Systems for Public Transport, Hong Kong, 2009.
- 26 23. Osuna, E.E. and G.F. Newell. Control strategies for an idealized public transport
27 system. *Transportation Science*, Vol.6 (1), 1972, pp.52-72.
- 28 24. Furth, P. G. and T.H.J. Muller. Service Reliability and Hidden Waiting Time:
29 Insights from Automated Vehicle Location Data. In *Transportation Research*
30 *Record: Journal of the Transportation Research Board*, No.1995, Transportation
31 Research Board of the National Academies, Washington, D.C., 2006, pp. 79-87.